

Clinton 50-A MOPED

ECONOMICAL TRANSPORTATION IN TODAY'S FUEL CONSCIOUS WORLD

BEST WHERE IT COUNTS

- Trouble-Free Reliability, Performance and Safety
- Quiet Motor Cycle - Type Muffler
- Delivers up to 150 M.P.G.
- Meets U.S. Department of Transportation Specifications and Requirements.
- Parts & Service Available



CLINTON ENGINES CORP.
Clark and Maple Sts., Maquoketa, Iowa 52060 TEL: 319-652-2411

One step ahead and doing better

CHARACTERISTICS

FRAME — Heavy-Gauge tubular steel frame gives the unit considerable strength and rigidity.

SUSPENSION — Telescopic Hydraulic front fork and adjustable rear fork absorber, both have excellent suspension. Besides providing a comfortable ride, this system is known for its stability on bumps and is regarded as a safety feature.

FUEL TANK — Detachable & w/reserve, larger capacity (1.1 gallon) means more miles per fill-up.

SEAT — W/spring; adjustable to one's comfort

WHEEL — 2 1/4" x 17" — a little larger than most moped wheels, gives excellent traction.

MUFFLER — The muffler is especially quiet and located on the right side of the unit to eliminate the possibility of an accidental leg burn.

SPEEDOMETER — Speedometer w/Odometer, separated from the headlamp. High visibility dial face, includes a turn signal indicator.

BRAKE SYSTEM — (a) — Internal expanding drum brake stop the unit at 13.1 ft. from 30 mph, well under the distance required by the U.S. NHTSA (National Highway Traffic Safety Administration).


(b) — Foot-operated rear coaster brake (recommended by U.S. Authorities), it has better sudden stopping power than a hand-operated brake.

(c) — Special design "Inspection Window" in the brake-backing plate to facilitate the checking of linking thickness of the drum brake shoe.

ELECTRIC SYSTEM — Generator-magneto w/ extra battery. The 22W electric power output is more than sufficient to give the headlight, tail light/stop light and directional signal, bright lighting capacity.

LIGHTING — Sealed-beam headlamp meets U.S. DOT (Department of Transportation) regulations. Large tail light and numerous reflectors are good safety features.

STANDARD EQUIPMENT — SAE Certified front & rear turn signal assembly, (left & right), rear view mirror, battery, tool bag.

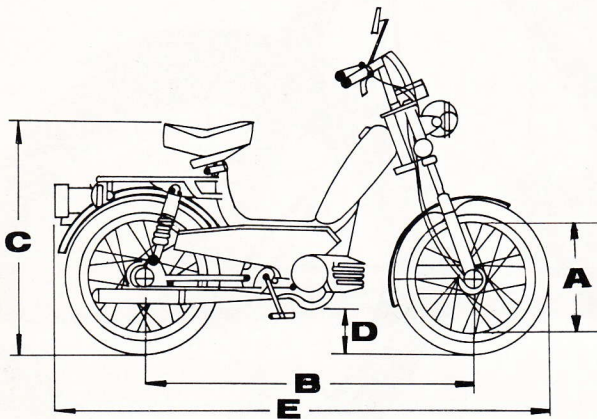

DIMENSIONS


A. Tire size, front & rear	2 1/4" x 17"
B. Wheelbase	44 1/8"
C. Saddle height	31"
D. Ground clearance	5"
E. Overall length	67 3/4"

SPECIFICATIONS

Engine type	SACHS 505/1A
Bore & Stroke	1.496" x 1.653"
Displacement	47 cc
Compression ratio	8:1
Carburetor	BING 12mm
Clutch type	centrifugal clutch
Drive system	Single chain
Transmission	Single speed
Gasoline/oil mixture	50:1
Electric system	BOSCH Magneto-generator w/battery

Specifications subject to change without notice.

See Your Clinton dealer

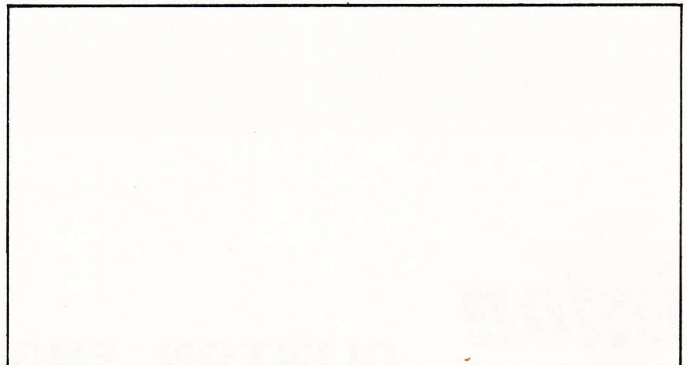



CLINTON ENGINES CORPORATION • MAQUOKETA, IOWA 52060

PHONE AREA 319 652-2411

Effective: January 1, 1982

CONFIDENTIAL DISTRIBUTOR

50-A MOPED PRICE LIST

DISTRIBUTOR NET COST	QTY	SUGGESTED DEALER NET	PER UNIT GROSS	GROSS MARGIN
\$423.48	1-49	\$538.97	\$115.49	21.4%
	50-99	\$500.46	\$ 76.98	15.4%
	100-196	\$461.97	\$ 38.49	9.0%
SUGGESTED RETAIL -----				\$769.95

ORDER 50 UNITS, GET ONE FREE

ORDER A 20 FT. (98) UNITS OR 40 FT. (196) UNITS STANDARD SHIPPING CONTAINER AND DELIVERY WILL BE F.O.B. YOUR NEAREST FREIGHT TERMINAL. NO FACTORY FREIGHT, \$\$\$ SAVINGS. ALLOW 60 DAYS FROM DATE OF ORDER.

FREIGHT: ----- F.O.B. FACTORY MAQUOKETA, IOWA

SHIPPING WEIGHT: ---- 135 LBS.

CARTON SIZE: ----- 56 x 11½ x 30¼ (10.69 CU. FT.)

TERMS: ----- NET 30 DAYS - DOMESTIC L/C

PRICES AND MODEL SUBJECT TO CHANGE WITHOUT NOTICE.